



# strands®

-lighting division

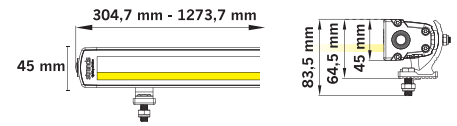

## SIBERIA XP SR

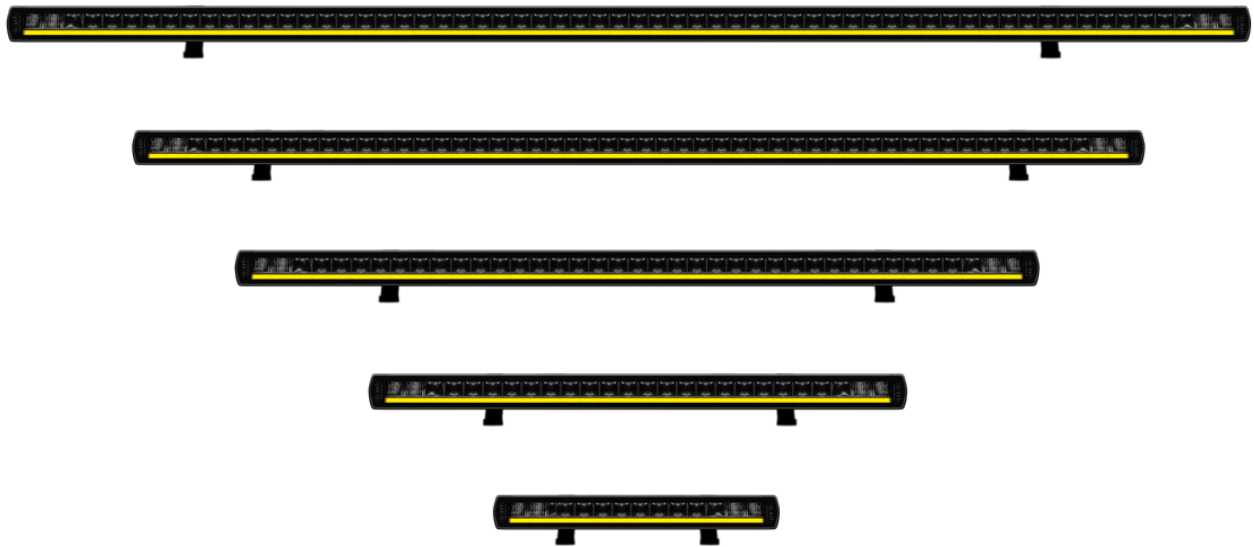

PART NO.	809411	809412	809413	809414	809415
VOLTAGE	10-32V DC	10-32V DC	10-32V DC	10-32V DC	10-32V DC
CONSUMPTION, XPERIENCE-MODE	50W	102W	166W	239W	240W
CONSUMPTION, E-MODE	25W	25W	30W	25W	30W
ACTUAL LUMEN, XPERIENCE-MODE	3620 lm	7150 lm	10 950 lm	14 760 lm	16 500 lm
ACTUAL LUMEN, E-MODE	1725 lm	1875 lm	1750 lm	1500 lm	1475 lm
1 LUX @, XPERIENCE-MODE	454 m	602 m	734 m	858 m	878 m
1 LUX @, E-MODE	300 m	300 m	300 m	300 m	300 m
COLOR TEMPERATURE	5700K	5700K	5700K	5700K	5700K
BEAM PATTERN	Optimized beam	Extended beam	Long-distance beam	Long-distance beam	Long-distance beam
IP-CLASS	IP68/IP69K	IP68/IP69K	IP68/IP69K	IP68/IP69K	IP68/IP69K
COLOR LENS	Clear	Clear	Clear	Clear	Clear
HELLO FUNCTION	No	Yes	Yes	Yes	Yes
POSITION LIGHT	White and Yellow	White and Yellow	White and Yellow	White and Yellow	White and Yellow
CONNECTION	DT-4	Cable	Cable	Cable	Cable
CABLE LENGTH	200 mm	2500 mm	2500 mm	2500 mm	2500 mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	304,7 mm	555,6 mm	814,7 mm	1069,7 mm	1273,7 mm
DEPTH	55,5 mm	55,5 mm	55,5 mm	55,5 mm	55,5 mm
HEIGHT	45 mm	45 mm	45 mm	45 mm	45 mm
HEIGHT INCLUDING BRACKET	64,5 mm	64,5 mm	64,5 mm	64,5 mm	64,5 mm
OPERATING TEMPERATURE	-35°C · +65°C	-35°C · +65°C	-35°C · +65°C	-35°C · +65°C	-35°C · +65°C
E-APPROVED	ECE R148 (R7), R149 (R112)	ECE R148 (R7), R149 (R112)	ECE R148 (R7), R149 (R112)	ECE R148 (R7), R149 (R112)	ECE R148 (R7), R149 (R112)
REF	20	20	20	20	20
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10	ECE R10