



strands®

-lighting division

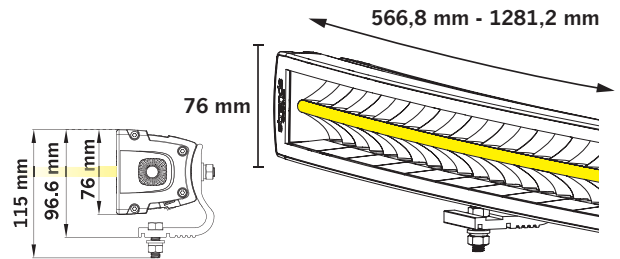

SIBERIA XP DRC

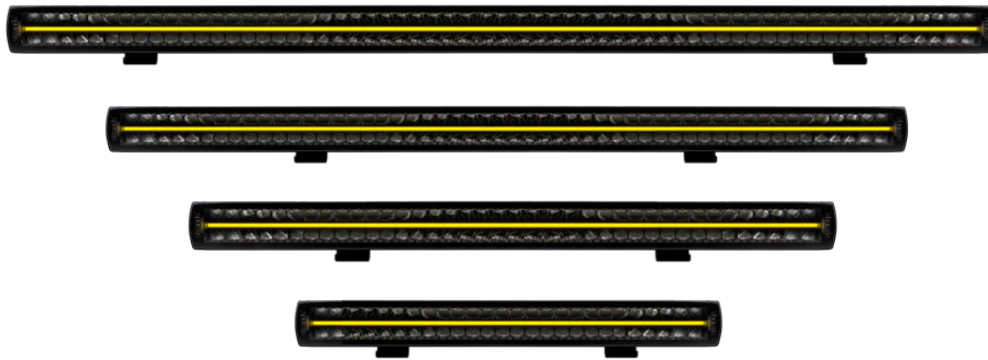

PART NO.	809431	809432	809433	809434
VOLTAGE	10-32V DC	10-32V DC	10-32V DC	10-32V DC
CONSUMPTION, XPERIENCE-MODE	184W	242W	334W	404W
CONSUMPTION, E-MODE	45W	55W	65W	75W
ACTUAL LUMEN, XPERIENCE-MODE	13 030 lm	18 590 lm	24 800 lm	28 100 lm
ACTUAL LUMEN, E-MODE	3100 lm	3500 lm	3450 lm	3425 lm
1 LUX @, XPERIENCE-MODE	616 m	610 m	688 m	714 m
1 LUX @, E-MODE	322 m	358 m	342 m	366 m
COLOR TEMPERATURE	5700K	5700K	5700K	5700K
BEAM PATTERN	Extended beam	Extended beam	Extended beam	Long-distance beam
IP-CLASS	IP68/IP69K	IP68/IP69K	IP68/IP69K	IP68/IP69K
COLOR LENS	Clear	Clear	Clear	Clear
HELLO FUNCTION	Yes	Yes	Yes	Yes
POSITION LIGHT	White and Yellow	White and Yellow	White and Yellow	White and Yellow
CONNECTION	Cable	Cable	Cable	Cable
CABLE LENGTH	2500 mm	2500 mm	2500 mm	2500 mm
MATERIAL HOUSING	Aluminium	Aluminium	Aluminium	Aluminium
MATERIAL LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
LENGTH	566,8 mm	823,5 mm	1078,7 mm	1281,2 mm
DEPTH	83,4 mm	97,8 mm	117,8 mm	137,7 mm
HEIGHT	76 mm	76 mm	76 mm	76 mm
HEIGHT INCLUDING BRACKET	96,6 mm	96,6 mm	96,6 mm	96,6 mm
OPERATING TEMPERATURE	-35°C · +65°C	-35°C · +65°C	-35°C · +65°C	-35°C · +65°C
E-APPROVED	No	No	No	No
EMC-CERTIFICATE	ECE R10	ECE R10	ECE R10	ECE R10